

# Spreader Beams

## Model 32 - Adjustable Spreader Beams




Shown with Option C

Specify Top Rigging

### PRODUCT FEATURES:

- Ideal where headroom is not limited.
- Adds stability to lift.
- Telescopic spread standard.
- Spread adjusts in 1" increments.
- Available with standard chain or wire rope rigging.
- Available with Adjust-A-Leg® rigging for off center load adjustment (minimum lifting capacity will be approximately 10-15% of beam rating).
- Wide range of additional sizes and capacities available.
- Complies with ASME standards.

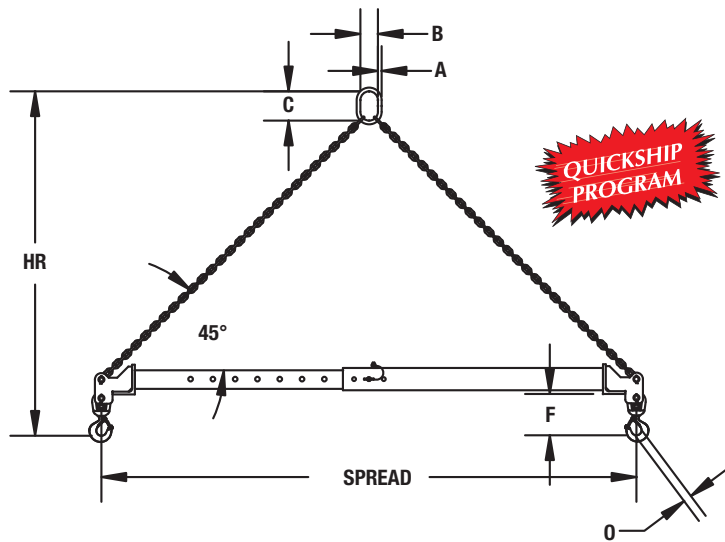

### SPECIFICATIONS

| Capacity (tons) | Model Number | Spread (ft.) Min./Max. | HR Headroom Min./Max. w/chain (in.) | Weight Beam & Hooks (lbs.) | A Oblong Dia. (in.) | B Oblong Width (in.) | C Oblong Height (in.) | F - Hook To Beam Bottom (in.) | O - Hook Opening w/latch (in.) | Chain Rigging Weight (lbs.) |
|-----------------|--------------|------------------------|-------------------------------------|----------------------------|---------------------|----------------------|-----------------------|-------------------------------|--------------------------------|-----------------------------|
| 2               | 32-2-4/6     | 4 / 6                  | 48/57                               | 70                         | 1/2                 | 2.36                 | 3.94                  | 5.5                           | 0.97                           | 9                           |
|                 | 32-2-6/10    | 6 / 10                 | 72/88                               | 85                         |                     |                      |                       |                               |                                | 13                          |
|                 | 32-2-8/14    | 8 / 14                 | 96/113                              | 175                        |                     |                      |                       |                               |                                | 17                          |
|                 | 32-2-12/20   | 12 / 20                | 132/166                             | 245                        |                     |                      |                       |                               |                                | 23                          |
| 5               | 32-5-4/6     | 4 / 6                  | 55/64                               | 105                        | 1                   | 5.38                 | 7.09                  | 8.4                           | 1.41                           | 34                          |
|                 | 32-5-6/10    | 6 / 10                 | 79/95                               | 160                        |                     |                      |                       |                               |                                | 47                          |
|                 | 32-5-8/14    | 8 / 14                 | 102/126                             | 205                        |                     |                      |                       |                               |                                | 61                          |
|                 | 32-5-12/20   | 12 / 20                | 138/172                             | 670                        |                     |                      |                       |                               |                                | 82                          |
| 10              | 32-10-4/6    | 4 / 6                  | 60/69                               | 95                         | 1-1/4               | 5.71                 | 10.83                 | 10.6                          | 1.78                           | 49                          |
|                 | 32-10-6/10   | 6 / 10                 | 74/111                              | 175                        |                     |                      |                       |                               |                                | 69                          |
|                 | 32-10-8/14   | 8 / 14                 | 108/132                             | 460                        |                     |                      |                       |                               |                                | 88                          |
|                 | 32-10-12/20  | 12 / 20                | 144/163                             | 680                        |                     |                      |                       |                               |                                | 118                         |
| 15              | 32-15-4/6    | 4 / 6                  | 64/72                               | 165                        | 1-1/2               | 5.90                 | 10.5                  | 13.6                          | 2.22                           | 78                          |
|                 | 32-15-6/10   | 6 / 10                 | 87/104                              | 365                        |                     |                      |                       |                               |                                | 111                         |
|                 | 32-15-8/14   | 8 / 14                 | 111/135                             | 478                        |                     |                      |                       |                               |                                | 145                         |
|                 | 32-15-12/20  | 12 / 20                | 147/180                             | 700                        |                     |                      |                       |                               |                                | 194                         |

### TOP RIGGING OPTIONS

#### OPTION C

Chain top rigging from beam to crane hook.

#### OPTION W

Wire rope top rigging from beam to crane hook.



The Caldwell Group • 800-628-4263 • www.caldwellinc.com

Strong-Bac® Section  
2011-2013 Master Catalog