# **Independent Drive**

### **Independent Drive System**





Consists of two powered drive units suspended from two cranes/hoists, with pocketed sheave driving special coil link chain slings that rotate large heavy, bulky items for assembly, welding positioning, and inspection. Drive units can either be operated independently or together, through an operator pendant(s), or remote control.





## **Independent Drive**



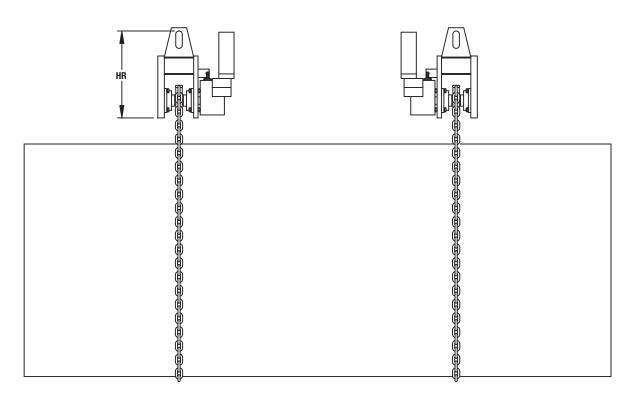

#### PRODUCT FEATURES:

- Two powered drive units for precise control.
- Chain slings have disconnect hardware allowing them to be positioned underneath the load.
- Over travel limit switches prevent chain disconnect hardware from running over chain sprocket.
- Standard models include operator pendant on each unit for independent operation, optional remote control allows for simultaneous operation.

### **SPECIFICATIONS - Independent Drive**

от долго том от				
Model	Capacity	HR Headroom	Chain	Weight
Number	(lbs.)	(in.)	(in.)	Each (lbs.)
2-10ID-0	10000	30	3/8	800
2-20ID-0	20000	40	5/8	1250
2-30ID-0	30000	40	7/8	1600
2-40ID-0	40000	40	7/8	1700
2-60ID-0	60000	40	7/8	1700
2-80ID-0	80000	42	7/8	2000
2-120ID-0	120000	42	1	4000
2-160ID-0	160000	60	1 1/4	5000